




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F02C 7/20, F01D 25/28	A1	(11) International Publication Number: WO 97/30276 (43) International Publication Date: 21 August 1997 (21.08.97)
<p>(21) International Application Number: PCT/NO96/00278</p> <p>(22) International Filing Date: 22 November 1996 (22.11.96)</p> <p>(30) Priority Data: 960571 13 February 1996 (13.02.96) NO</p> <p>(71) Applicant (for all designated States except US): KVÆRNER ENERGY A.S [NO/NO]; Kvæmerveien 10, N-0192 Oslo (NO).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): JAHR, Knut [NO/NO]; Harald Hårfagres vei 26c, N-1412 Sofiemyr (NO). FREY, Tom, Erik [NO/NO]; Kisaveien 67, N-2078 Nordkisa (NO).</p> <p>(74) Agent: TOFTING, Arild; Bryns Patentkontor a/s, P.O. Box 765, Sentrum, N-0106 Oslo (NO).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. In English translation (filed in Norwegian).</p>	

(54) Title: TURBINE PACK AND METHOD FOR ADAPTING A TURBINE PACK

(57) Abstract

A device and method for adapting a turbine package, comprising a turbine and a frame (R), where the turbine comprises an inlet bell mouth (1, 4, 8) and/or an exhaust bell mouth, and where there is a difference in length between two or more dissimilar models of turbines, so that the anchorage points (12, 13) of the bell mouth door (2, 5) or the plenum wall for the turbines do not correspond. The adaptation may, for example, be carried out either by extending the inlet bell mouth (8) of the shorter turbine, so that the anchorage points (12, 13) of the bell mouth doors (5, 10) of the two turbines correspond and by producing the frame so that the bell mouth door (10) is positioned in accordance with the corresponding anchorage points (12, 13), or by providing the bell mouth door with a conical section (24) having a length corresponding to the length difference between the turbines.

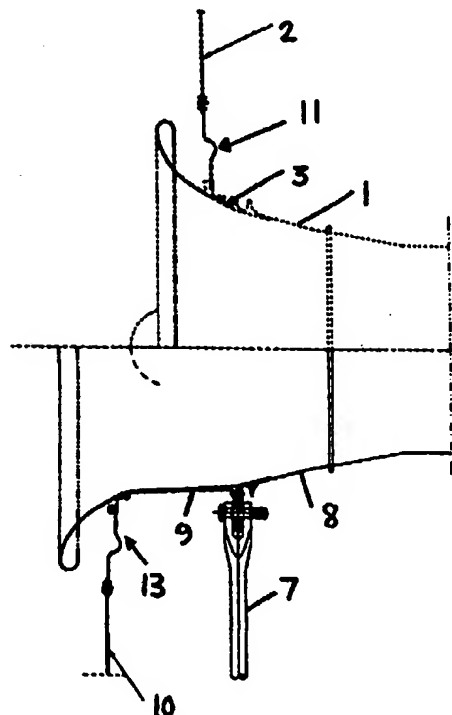

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TURBINE PACK AND METHOD FOR ADAPTING A TURBINE PACK

The invention relates to a turbine package, and to a method
5 for adapting a turbine package, according to the preamble to
claims 1 and 8.

A widely used gas turbine, having the designation LM 2500,
from General Electric, is produced in two models, the
10 standard version LM 2500 PE (PE) and a new, upgraded model
having the designation LM 2500 Plus (Plus).

The Plus version is upgraded from an output of 22 MW for the
PE version to 29 MW. The main change made during the
15 upgrading consists in introducing a zero step in the compres-
sor, so that the flow volume through the turbine is increased
by 23%. The new step increases the length of the turbine by
13,38" (34 cm). This increase in length results in making
the PE and the Plus turbine non-interchangeable, in particu-
20 lar because the bell mouth door of the PE turbine package
would collide with the support bracket anchorage points of
the Plus turbine if a Plus turbine were placed in a PE
turbine package. It is not possible to change the anchorage
points of the turbine, since these are carefully determined
25 with respect to the natural frequency of the turbine, thermal
influences, the distribution of forces and the flow charac-
teristics at the inlet.

Accordingly, in case of a future upgrading by means of a
30 change from a PE turbine to a Plus turbine, this increased
length will involve substantial reconstruction of the turbine
package (which comprises turbine, frame and supporting means
for the turbine). The reconstruction will be costly and
will entail a lengthy standstill before the new turbine can
35 be put into service. Moving the inlet bell mouth door is
particularly problematic. The mountings for the turbine on
the frame cannot be used either, and it is therefore, in

general, just as simple to exchange the whole frame, a process which obviously is very expensive. Moreover, this will make it impossible to change back to a PE turbine later, for example as a reserve turbine when the Plus turbine is
5 undergoing repairs, etc.

The object of the present invention is to solve this problem in a manner which makes it possible to use the same frame for both the PE turbine and the Plus turbine. This is
10 achieved by the features apparent from the characterizing clause of the subsequently disclosed claims 1 and 8.

In addition, possibilities have been explored for using at least some of the same anchorage points on the frame for
15 support brackets and stays for the two turbine types. This is made possible in that the brackets and stays are interchangeable with brackets and stays adapted to each turbine type.

20 The invention will now be further explained with reference to the enclosed drawings wherein

Fig. 1 shows, on top, a section of one end of the PE turbine and, at the bottom, one end of a Plus turbine, both having
25 regular standard inlet bell mouths;

Fig. 2 shows, on top, the same end of the PE turbine having a regular inlet bell mouth, like in Fig. 1, and, at the bottom, the same end of the PE turbine having a modified
30 bell mouth:

Figs. 3 and 4 show a Plus turbine, seen from the side and from the end, respectively;

35 Figs. 5 and 6 show a modified PE turbine seen from the side and from the end, respectively;

Figs. 7 and 8 show another modified PE turbine seen from the side and from the end, respectively;

5 Figs. 9 and 10 show a PE turbine seen from the side and the end, respectively, the bell mouth door having been modified whereas the turbine itself is standard.

10 In the upper part of Figure 1, there is depicted one end of a PE turbine A having an inlet bell mouth 1. A bell mouth door 2, extending substantially perpendicularly out from the inlet bell mouth 1, is connected to the bell mouth 1 at an anchorage point 11. One may also glimpse an anchorage point 3 for securing a support running from the bell mouth to the turbine frame R (see Figure 5).

15 In the lower part of Figure 1, one end of a Plus turbine B having an inlet bell mouth 4 is depicted. Here, as well, a bell mouth door 5 is connected to the bell mouth 4 at an anchorage point 12, and there is an anchorage point 6 for connection with a support 7 for the turbine connected to the bell mouth. Here it is seen that the increased length Lt of the Plus turbine B entails that the position of the bell mouth door 5 having the anchorage point 12 for the Plus turbine B is extensively displaced in relation to the position of the bell mouth door 2, having anchorage point 11 for the PE turbine A, and that the bell mouth door 2 would come into conflict with the anchorage point 6 for the support 7. Mounting the Plus turbine B on the frame R of the PE turbine A is thus impossible without extensive modification of the frame R since the placement of said anchorage point for the bell mouth door will not correspond with the new turbine.

30 In figure 2, the upper part is identical to the upper part of Figure 1 and shows one end of the PE turbine A, including an inlet bell mouth 1, a bell mouth door 2 having an anchorage point 11, and an anchorage point 3. The lower part shows,

however, a modified bell mouth for a PE turbine A, where the bell mouth 1 is extended with a distance piece 9 so that the bell mouth door 10 having an anchorage point 13 will be located at the same place as the bell mouth door 5 for the Plus turbine B. Thus, the new Plus turbine B may be mounted directly on the same frame as the PE turbine A without the bell mouth door and its position needing to be modified, this frame R having already been prepared to receive a Plus turbine B.

10

In Figure 3 the Plus turbine B is shown in its entirety, viewed from the side. A support bracket 14 with pertaining stay 7 is also shown here. In Figure 4 two support brackets 14 and 15 are shown with pertaining stays 7 and 16. The support brackets are secured to the frame R in anchorage points 17 and 18. The frame and the turbine are enclosed in a housing, a wall of which is formed by the bell mouth door 2.

20 In Figures 5 and 6 the modified PE turbine A from Figure 2 is shown schematically in its entirety, viewed, respectively, from the side and from the end. Thus, it is here seen that the extension of the bell mouth 1 by means of the distance piece 9 entails that turbine A becomes as long as turbine B in Figure 3. A support bracket 19 and two stays 20 and 21, devised to secure turbine A to the frame R, are also shown. Here it is seen that the support bracket 19 is secured in the same anchorage point 17 on the frame R as the bracket 14 in Figs. 3 and 4, whereas the stay 21 is fastened to an anchorage point 22.

30

In Figures 7 and 8 a somewhat different version of a modified PE turbine A is shown. Instead of adding the distance piece 9, the bell mouth 1 is here exchanged with a completely novel and longer bell mouth 23. The bell mouth 23 exceeds the standard bell mouth length of the PE turbine A by a length Lt.

35

In Figures 9 and 10 there is shown another way of adapting a turbine package so that it may comprise PE turbine A and Plus turbine B, respectively. Instead of extending the bell mouth 1 of the PE turbine A, an adaptation has here been carried out of the bell mouth door 2 so that it has been provided with a conical section 24, extending from the plane of the bell mouth door to a plane that cuts through the anchorage points 11 for the bell mouth door on the bell mouth 1. When the Plus turbine B is to be mounted on the frame R the conical section 24 is removed and replaced by a standard bell mouth door.

Although the preceding description is based on specific turbine types, it is obvious that the art described above may also be used for any other combination of turbine types. Nor is there any limitation with respect to the invention in the number of steps the upgrading may contain. It will therefore be theoretically possible to use the described art also for upgrading procedures comprising 4 or 5 steps for exchanging the turbine with turbines of a longer type. Downgrading to turbines of a shorter type is also theoretically possible by means of the described art.

Moreover, the invention is not limited to use in connection with longitudinal adaptation at the inlet end, but can also be used in an analogous manner by adaptation of the outlet end. For turbines using an inlet plenum and an outlet plenum instead of a housing having a bell mouth door, the longitudinal adaptation may be achieved in a manner exactly analogous to that described in the preceding pages. The plenum wall will then replace the bell mouth door.

Patent Claims

1.

A turbine package,

5 c h a r a c t e r i z e d i n t h a t i t c o m p r i s e s

- a turbine A of a first type T_a having a total length L_a ,
said turbine A comprising an inlet bell mouth (1) and/or
an exhaust bell mouth, provided with an anchorage point
10 for a bell mouth door or a plenum wall, or
- a turbine B of a second type T_b having a total length L_b ,
said turbine comprising an inlet bell mouth (4) and/or an
exhaust bell mouth, provided with an anchorage point for a
15 bell mouth door or a plenum wall, and
- a frame (R), said frame (R) being provided with a bell
mouth door (2) or a plenum wall, provided with an
anchorage point for a turbine inlet bell mouth and/or an
20 exhaust bell mouth, said frame (R) comprising anchorage
points for support brackets and/or stays for mounting a
turbine on the frame (R),
- where the two turbine types T_a and T_b are different and
25 the length L_a is shorter than the length L_b , and
- where the inlet area and/or the exhaust area of the
turbine package is extended by a length L_t corresponding
to the difference between the length L_a and the length L_b ,
30
- so as to make possible thereby the mounting of either
turbine A or turbine B on the frame (R) without requiring
a change lengthwise in the position of the bell mouth door
(2) or the plenum wall on the frame (R).

35

2.

A device according to claim 1,

c h a r a c t e r i z e d i n that the inlet bell mouth (1) and/or the exhaust bell mouth has been extended by a length L_t corresponding to the difference between the length L_a and the length L_b , so that the anchorage point on turbine A for the bell mouth door (2) or plenum wall of the frame (R) corresponds, in the longitudinal direction of the turbine, to the anchorage point on turbine B for the bell mouth door (2) or plenum wall of the frame (R).

3.

A device according to claim 1, c h a r a c t e r i z e d i n that the bell mouth door (2) or plenum wall of the frame (R) has been provided, for the mounting of turbine A, with a substantially conical portion extending from the plane of the bell mouth door (2) or the plenum wall to the anchorage point for the bell mouth door or plenum wall on the inlet bell mouth (1) or exhaust bell mouth, said conical portion having a length L_t , and that the bell mouth door (2) or the plenum wall, for the mounting of turbine B, is generally plane, so that the mounting connectors of the bell mouth door or the plenum wall on the inlet bell mouth at all times correspond to the anchorage points on the inlet bell mouth or the exhaust bell mouth for the bell mouth door or plenum wall.

25

4.

A device according to claim 2, c h a r a c t e r i z e d i n that the bell mouth (1) is extended by the introduction of a distance piece (9) having a length L_t .

30

5.

A device according to claim 2, c h a r a c t e r i z e d i n that the bell mouth (1) is exchanged with a new bell mouth which is longer than the bell mouth (1) by a distance L_t .

35

6.

A device according to claims 1, 2, 3, 4 or 5,
c h a r a c t e r i z e d i n that it as an alternative to
turbine A or B may comprise a turbine C, optionally a
5 plurality of turbines, having a length L_c which lies between
 L_a and L_b or is shorter than L_a or longer than L_b , the inlet
area and/or exhaust area being extended a length L_f corre-
sponding to the difference in length between any of the
lengths L_a , L_b and L_c .

7.

A device according to any one of the preceding claims,
c h a r a c t e r i z e d i n that the support brackets
and/or stays for mounting the turbine on the frame (R) are
15 exchangeable and that the support brackets and/or stays
adapted to mount turbine A may be secured to at least some of
the anchorage points on the frame (R) for support brackets
and/or stays adapted to mounting turbine B, and, optionally,
that support brackets adapted to mount turbine C may be
20 secured to at least some of the anchorage points on the frame
(R) for support brackets and/or stays adapted for mounting
turbine A and/or turbine B.

8.

25 A method for adapting a turbine package,
c h a r a c t e r i z e d b y extending the inlet area of
the turbine package, said turbine package comprising

- a turbine A of a first type T_a having a total length L_a ,
30 said turbine A comprising an inlet bell mouth (1) and/or
an exhaust bell mouth, provided with an anchorage point
for a bell mouth door or a plenum wall, or
- a turbine B of a second type T_b having a total length L_b ,
35 said turbine comprising an inlet bell mouth (4) and/or an
exhaust bell mouth, provided with an anchorage point for a
bell mouth door or a plenum wall, and

- a frame (R), said frame (R) being provided with a bell mouth door (2) or a plenum wall, provided with an anchorage point for a turbine inlet bell mouth and/or an exhaust bell mouth, said frame (R) comprising anchorage points for support brackets and/or stays for mounting a turbine on the frame (R),
- where the two turbine types Ta and Tb are different and the length La is shorter than the length Lb, and
- where the inlet area and/or the exhaust area of the turbine package is extended by a length Lt corresponding to the difference between the length La and the length Lb,
- so as to make possible thereby the mounting of either turbine A or turbine B on the frame (R) without requiring a change lengthwise in the position of the bell mouth door (2) or the plenum wall on the frame (R).

9.

A method according to claim 8,

characterized in that the inlet bell mouth (1) and/or the exhaust bell mouth is extended by a length Lt corresponding to the difference between the length La and the length Lb, so that the anchorage point on turbine A for the bell mouth door (2) or plenum wall of the frame (R) corresponds, in the longitudinal direction of the turbine, to the anchorage point on turbine B for the bell mouth door (2) or plenum wall of the frame (R).

10.

A method according to claim 8,

characterized in that the bell mouth door (2) or plenum wall of the frame (R) is provided, for the mounting of turbine A, with a substantially conical portion extending from the plane of the bell mouth door (2) or the plenum wall

to the anchorage point for the bell mouth door or plenum wall on the inlet bell mouth (1) or exhaust bell mouth, said conical portion having a length L_t , and that the bell mouth door (2) or the plenum wall, for the mounting of turbine B, is generally devised as a plane part, so that the mounting connectors of the bell mouth door or the plenum wall on the inlet bell mouth at all times correspond to the anchorage points on the inlet bell mouth or the exhaust bell mouth for the bell mouth door or plenum wall.

11.

A method according to claim 9,

characterized in that the bell mouth (1) is extended by the introduction of a distance piece (9) having a length L_t .

12.

A method according to claim 9,


characterized in that the bell mouth (1) is exchanged with a new bell mouth which is longer than the bell mouth (1) by a distance L_t .

13.


A method according to claims 8, 9, 10, 11 or 12,

characterized in that the turbine package as an alternative to turbine A or B may be provided with a turbine C, optionally a plurality of turbines, having a length L_c which lies between L_a and L_b or is shorter than L_a or longer than L_b , the inlet area and/or exhaust area being extended a length L_f corresponding to the difference in length between any of the lengths L_a , L_b and L_c .

1/6

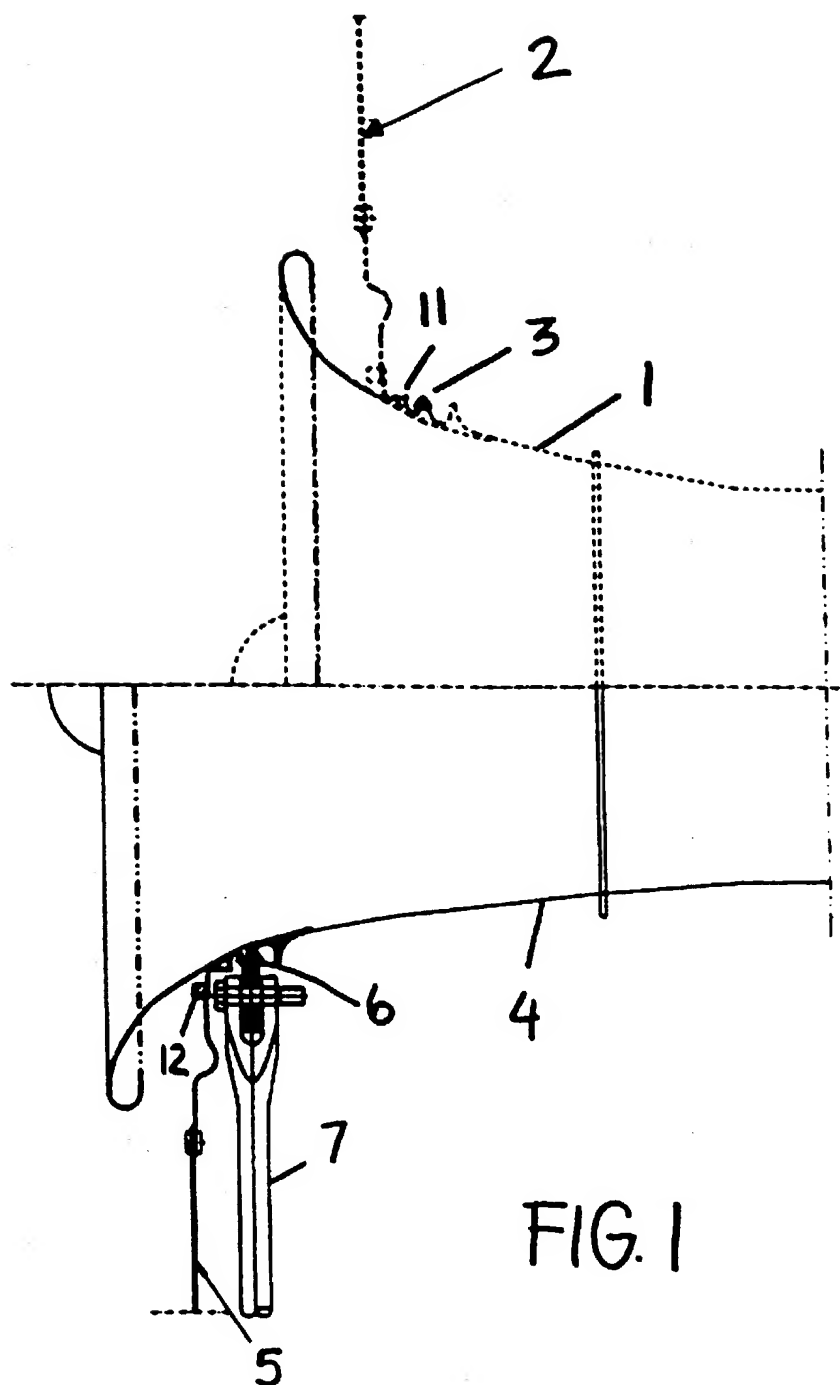

2/6

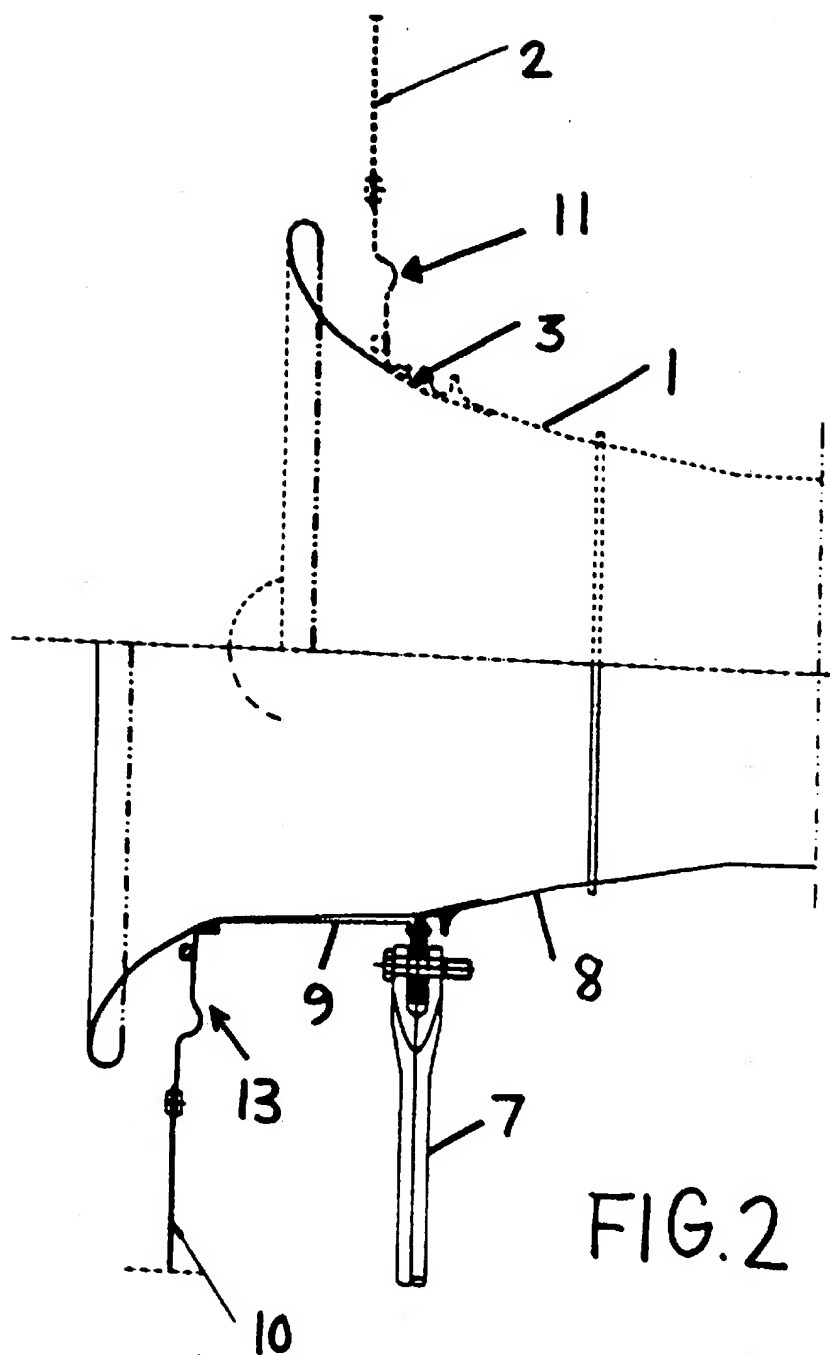

3/6

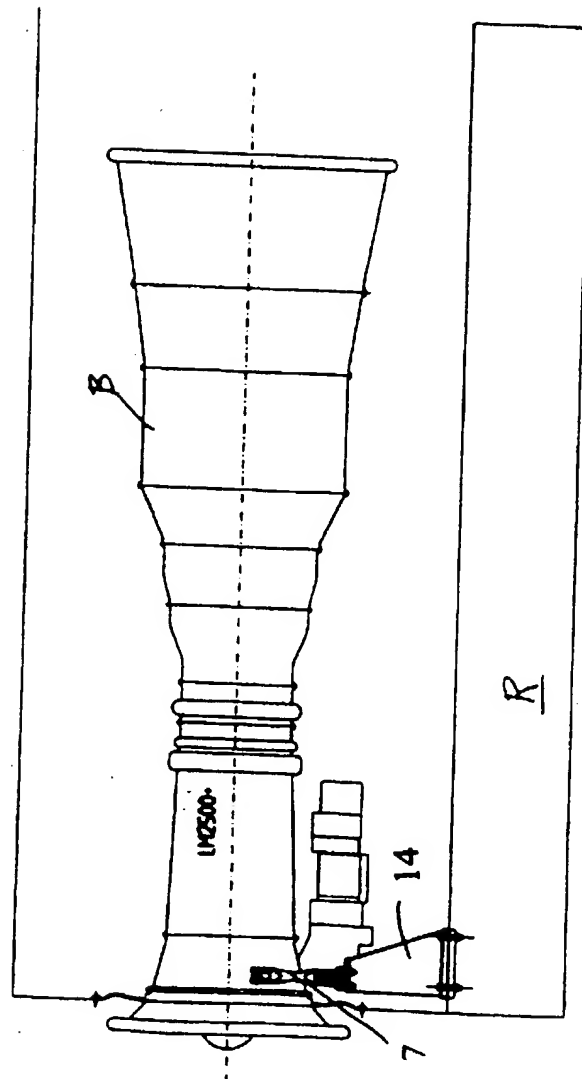


Fig. 3

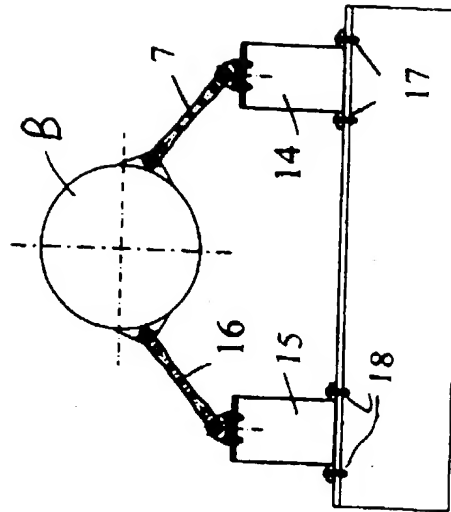


Fig. 4

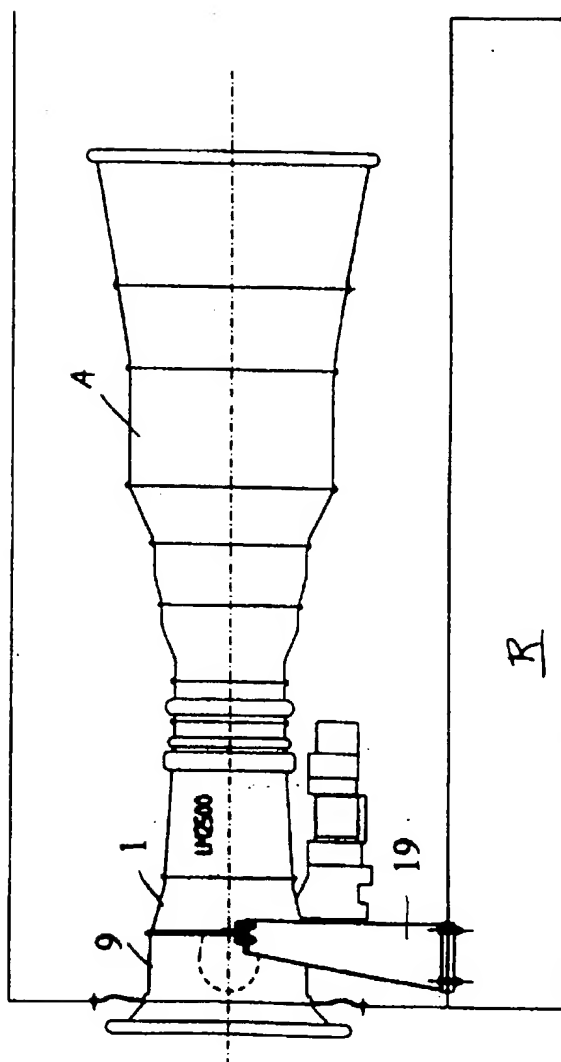


Fig. 5

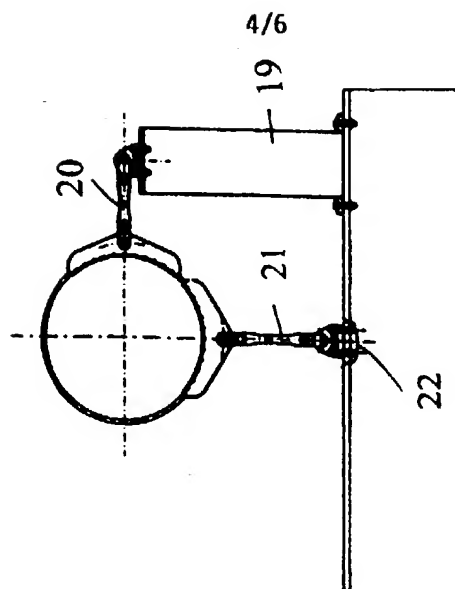


Fig. 6

5/6

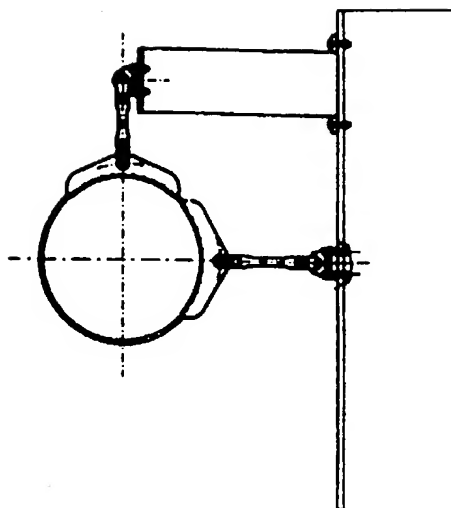


Fig. 8

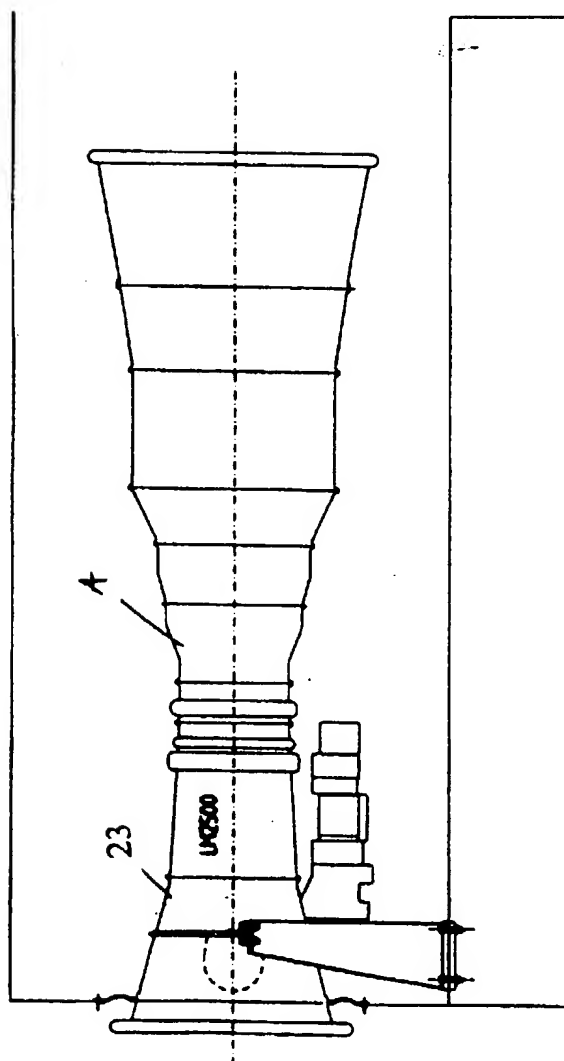


Fig. 7

6/6

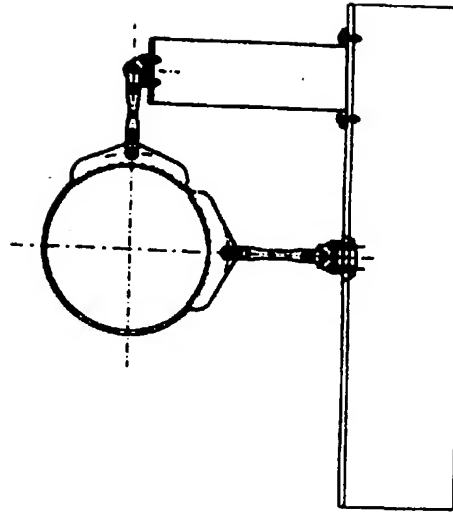


Fig. 10

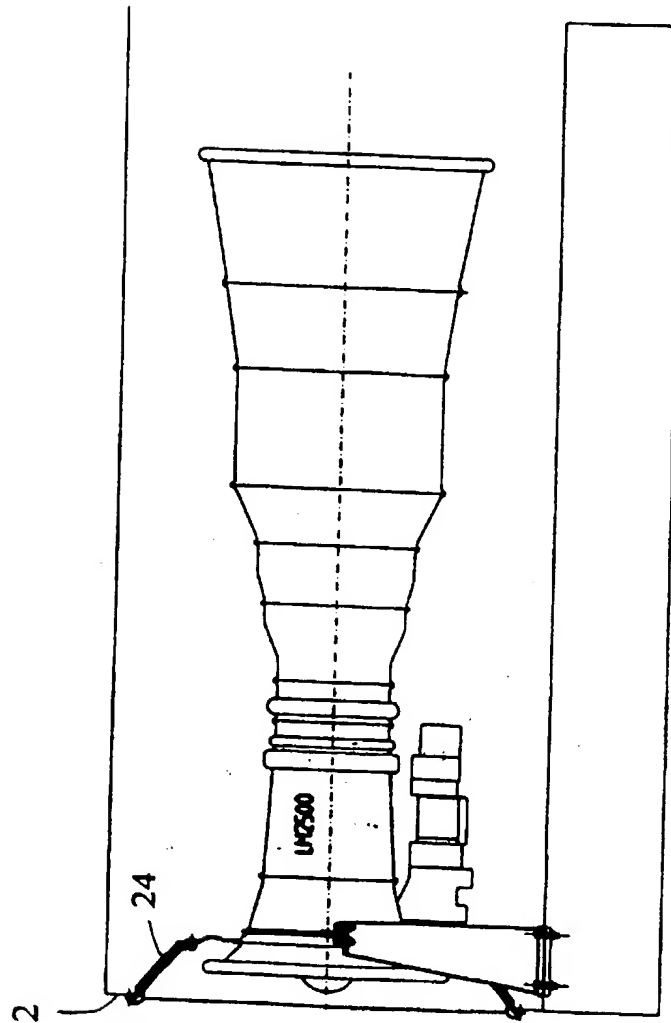


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 96/00278

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: F02C 7/20, F01D 25/28 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: F01D, F02C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4516908 A (VINCIGUERRA), 14 May 1985 (14.05.85) --	1-13
A	US 4050660 A (EGGMANN ET AL), 27 Sept 1977 (27.09.77) --	1-13
A	US 4002023 A (HARTMANN), 11 January 1977 (11.01.77) --	1-13
A	US 3907220 A (AMELIO), 23 Sept 1975 (23.09.75) -- -----	1-13
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
23 April 1997		26 -04- 1997
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Per-Olof Warnbo Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/04/97

International application No.

PCT/NO 96/00278

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4516908 A	14/05/85	CA 1178894 A	04/12/84
		CH 649132 A,B	30/04/85
		DE 3214101 A,C	04/11/82
		FR 2504194 A,B	22/10/82
		GB 2097100 A,B	27/10/82
		JP 57186024 A	16/11/82
		SE 445059 B,C	26/05/86
		SE 8202387 A	18/10/82
US 4050660 A	27/09/77	CA 1045391 A	02/01/79
		CH 592268 A	14/10/77
		DE 2532456 A,C	27/01/77
		FR 2316530 A,B	28/01/77
		GB 1549682 A	08/08/79
		JP 52006812 A	19/01/77
		SE 415906 B,C	10/11/80
		SE 7607569 A	03/01/77
US 4002023 A	11/01/77	CH 569861 A	28/11/75
		DE 2424093 A,C	23/10/75
		FR 2267456 A,B	07/11/75
		GB 1464705 A	16/02/77
		JP 50138326 A	04/11/75
		SE 406212 B,C	29/01/79
		SE 7503908 A	10/10/75
US 3907220 A	23/09/75	AU 7789975 A	05/08/76
		BR 7501450 A	23/12/75
		CA 1020142 A	01/11/77
		DE 2510213 A,C	26/02/76
		FR 2264241 A,B	10/10/75
		GB 1488928 A	19/10/77
		JP 50127008 A	06/10/75